

HONEYWELL OPTIMIZER VAV CONTROLLER

The Honeywell Optimizer VAV controller is a programmable room controller with an integrated actuator and airflow sensor for VAV application.

These VAV controllers are fully programmable with universal inputs and outputs, providing configuration flexibility to achieve a variety of specific applications. Smart engineering and commissioning tools with Honeywell Optimizer Workbench and the Honeywell Connect Mobile application for test and balance make installation cost-effective.

This controller offers BACnet™ IP or BACnet™ MS/TP, Sylk™ bus technology, Modbus RTU RS-485, flexible universal input/output (UIO) points, and solid-state relays (SSR).



Honeywell Optimizer VAV Controller

FEATURES AND HIGHLIGHTS

COMMUNICATION

- Supports BACnet™ IP or BACnet™ MS/TP bus for communication.
- BTL®-listed, IP VAV: B-AAC profile and MS/TP VAV: B-AAC profile
- BACnet™ IP enables faster download, thereby reducing commissioning time, and increased data bandwidth for increased data sharing compared to traditional BACnet™ MS/TP communication.
- BACnet™ IP models supports:
 - IPv4 addressing
 - DHCP and Link Local addressing modes
 - Connection speed: 10/100 Mbps
- Modbus RTU for integration purposes.
- BACnet MS/TP Auto baud rate functionality.
- Automatic addressing functionality.
- Sylk™ bus two-wire polarity-insensitive interface connects to Honeywell Sylk™ wall modules without using physical I/O points.
- Integrated BLE (Bluetooth®).

ALL-IN-ONE

- Freely programmable in Honeywell Optimizer Workbench.
- Compact design for small enclosures and easy to install on round and square ducts.
- Color-coded, removable terminal blocks to simplify wiring and replacement.
- Real-time clock, a supercapacitor for 24 hours data retention.
- 24 VAC power supply.
- 20 VDC at 75 mA auxiliary supply for field devices.
- Seven universal inputs/outputs usable as analog voltage/current output or as a universal/binary input.
- All UI can be used for pulse input. Maximum frequency 100 Hz, Minimum duty cycle (50 % / 50 %) 5 ms ON / 5 ms OFF.
- Five 24 VAC solid state relay outputs with 1.5 A continuous and 3.5 A in-rush for 0.1 seconds (100 ms) per SSR output.
- Features a non-isolated RS-485 interface for Modbus communication. Maximum eight Modbus devices.
 - Maximum 155 read or write data points for all the Modbus devices per controller.
 - Maximum six high-priority registers per controller.

ACTUATOR

- Integrated 44 in-lbs. (5 Nm) actuator with 90 sec runtime at 60 Hz (108 sec at 50 Hz) with analog position feedback.

PRESSURE SENSOR

- Field replaceable differential pressure sensor (± 500 Pa; accuracy $\pm 3\%$ of full range).


MOBILE APPLICATION

Mobile app for VAV balancing with easy access to the controller via Bluetooth integrated in the controller.

- Easy pairing without the need to open the ceiling.
- Supports Android and iOS.
- Language support: English, French, Spanish, German, Italian.
- Wireless signal strength indication.
- Password protection
- Supports different types of balancing (min/max, set point).
- Command individual/group of VAVs, e.g., open a group of VAV dampers.
- Provides a report on balancing activities.

Honeywell

CONTROLLER PART NUMBERS DESCRIPTION

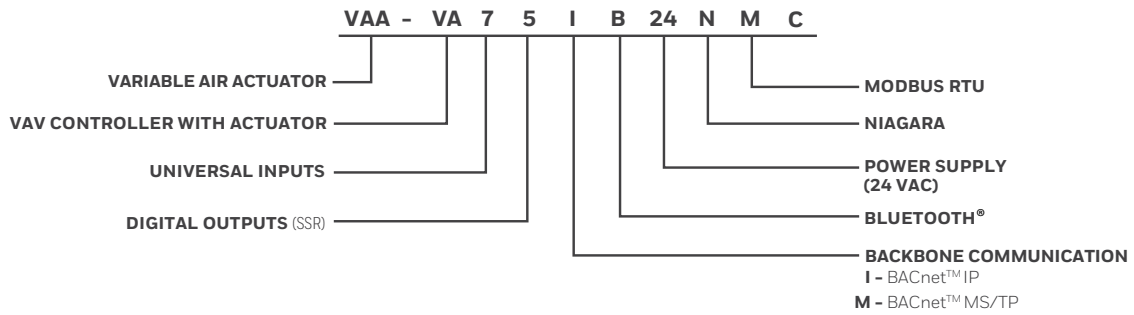

PART NUMBERS




VAV CONTROLLER PART NUMBERS

PART NUMBER	UNIVERSAL IO	SOLID STATE RELAY (SSR)	TOTAL IO	COMMUNICATION	BLUETOOTH®
VAA-VA75IB24NMC	7	5	12	IP	Yes
VAA-VA75I24NMC	7	5	12	IP	No
VAA-VA00IB24NMC	0	0	0	IP	Yes
VAA-VA75MB24NMC	7	5	12	MS/TP	Yes
VAA-VA75M24NMC	7	5	12	MS/TP	No
VAA-VA00MB24NMC	0	0	0	MS/TP	Yes

ACCESSORIES/REPLACEMENT PARTS


REPLACEMENT PART NUMBER	DESCRIPTION
SDPPF500PA	Airflow sensor replacement (Sold in pack of 2).
ANT-REM	Use the remote antenna if the antenna mounted on the controller does not provide reliable communication due to environmental conditions. (Sold in a pack of 4 antennas).

MOBILE APP

Honeywell Connect Mobile (HCM) app for the VAV balancing can be downloaded from the Google Play Store and Apple App Store. It provides easy access to the Honeywell Optimizer VAV controller via integrated Bluetooth.

DIMENSIONS AND WEIGHTS

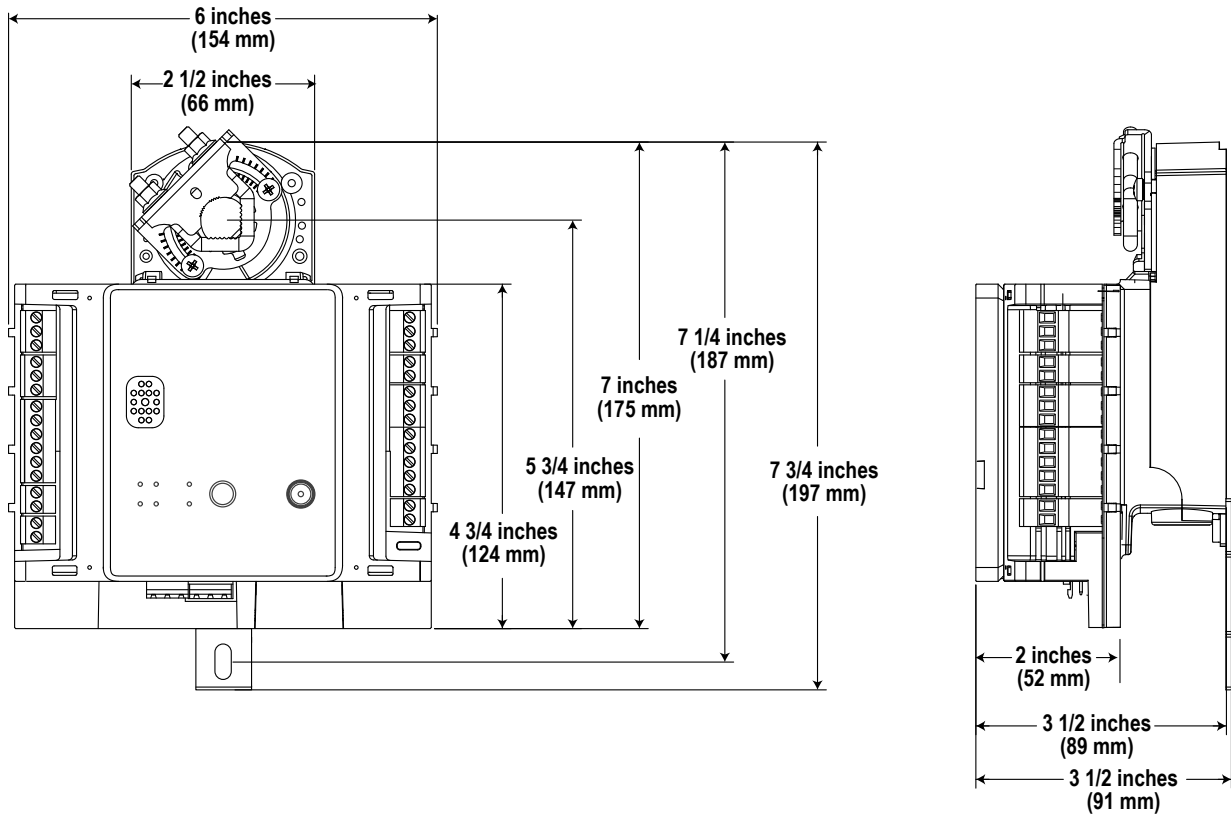

All dimensions are in inches (mm).


WEIGHT AND DIMENSIONS

PARAMETER	SPECIFICATION
Dimension (L x W x H)	3 1/2 x 6 x 7 3/4 inches (89 x 154 x 197 mm)
Weight	3.3 lbs. (1.5 kg)
Mounting	Fixation with bracket and shaft


HARDWARE OVERVIEW

TOP VIEW

SIDE VIEW

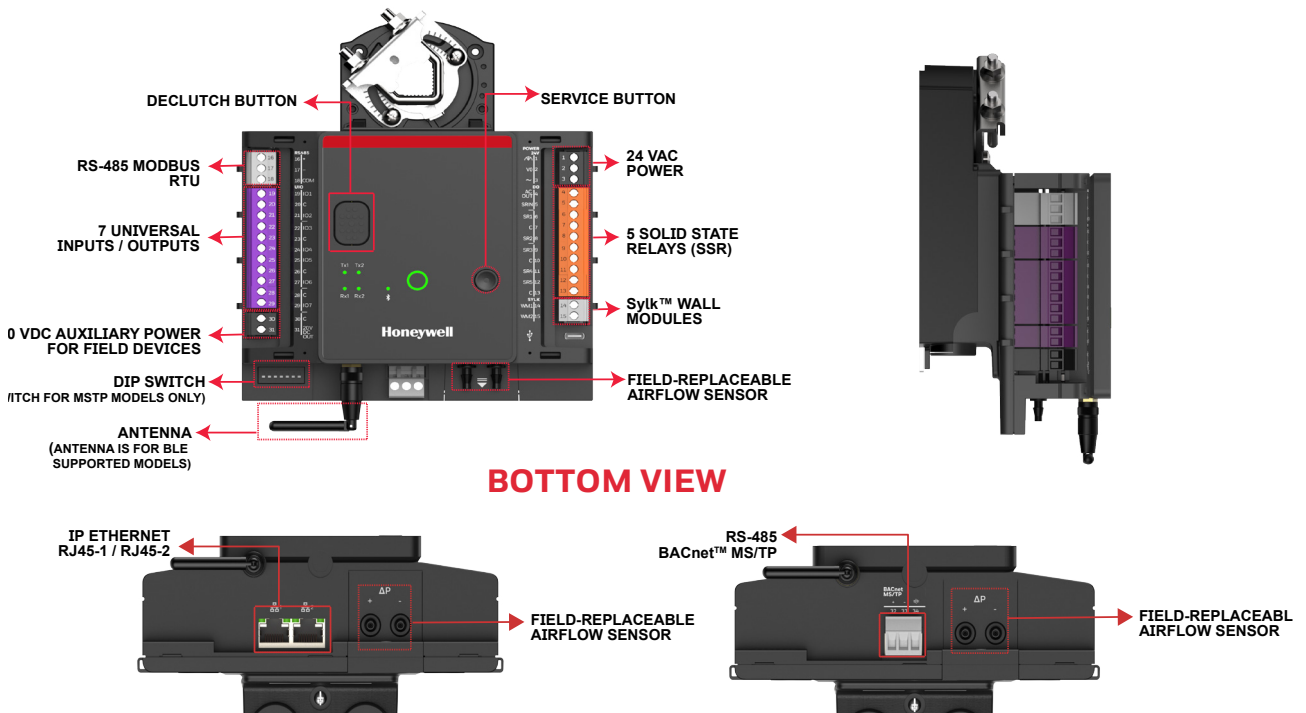

SYSTEM OVERVIEW

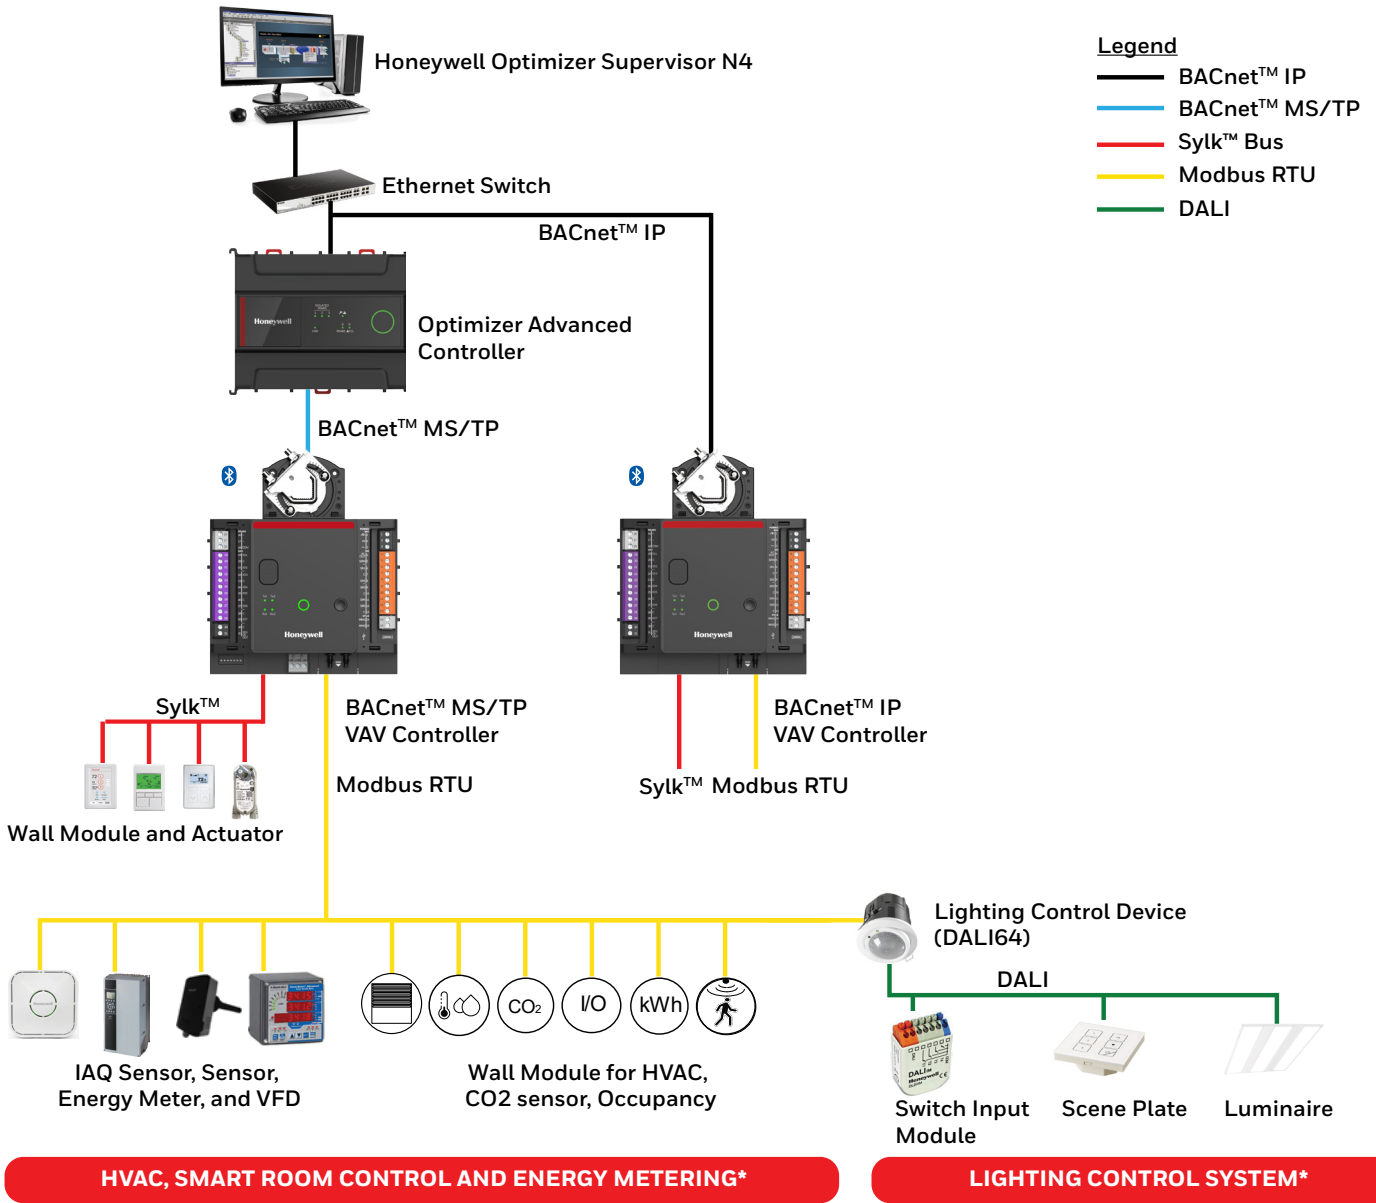

* Devices subject to local availability. Contact your local sales representative for information on available devices in your region.

PRODUCT SPECIFICATION

HARDWARE	
PARAMETER	SPECIFICATION
CPU	Crossover processor NXP I.MRT, Cortex M7
Memory capacity	16 MB QSPI Flash, 16 MB SDRAM
Ethernet	2 x RJ45 Ethernet ports with a protection that allows loop topology to continue the communication with other controllers even if one node fails, when used with an RSTP supporting device.
Real Time Clock	24-hour backup after power failure. In case of power failure, the controller includes a super capacitor to retain the time set with the built-in real time clock for 24 hours. After 24 hours, the time will reset to the factory default time until the user performs a BACnet™ Time Sync.
Small LEDs	Transmission or reception of BACnet™ and Modbus communication signal (green).
Large LEDs	Controller status such as normal operation, firmware download, broken sensor, e.g., green, yellow, or red.

ELECTRICAL	
PARAMETER	SPECIFICATION
Rated Input Voltage	20 - 30 VAC; class 2 transformer
Power Consumption for VAA-VA75xx24NMC	Nominal: 14.53 VA with actuator at nominal load and 20 V output (no Analog Outputs or SSRs being used). Maximum: 30 VA excluding SSRs. *For SSR consumption, see IMPORTANT NOTE below.
Power Consumption for VAA-VA00xB24NMC	Nominal: 15.33 VA (actuator at nominal load and IP communication active)
Frequency Range	50/60 Hz
Internal Power Supply	Half-wave rectifier

IMPORTANT NOTE: This device is UL listed and limited to 100 VA maximum. Binary output loads are restricted by this maximum VA rating. If all 5 SSR binary outputs are connected and fully loaded (@24 VA each) the total VA of the device will exceed the UL listed and limited maximum rating. DO NOT EXCEED 100 VA MAXIMUM RATING!

SYLK™ SUPPORTED DEVICES*	
Sylk™ wall modules	TR42, TR42-H, TR42-CO2, TR42-H-CO2, TR71, TR71-H, TR75, TR75-H, TR120 (TR75-E), and TR120-H TR75-HE (emulation mode only).
Sylk™ sensor	TR40, TR40-H, TR40-CO2, TR40-H-CO2, TR50 (emulation mode only), and C7400S sensor
Sylk™ actuator	MS3103, MS3105, MS3110 (5 Nm), and MS3120 (10 Nm)
Non Sylk™ actuators	MS4103, MS4105, MS7403, MS7405, MS7503, MS7505, MS8103, MS8105

OPERATIONAL ENVIRONMENT	
PARAMETER	SPECIFICATION
Storage Temperature	-40 °F to 150 °F (-40 °C to 66 °C)
Operating Temperature	32 °F to 122 °F (0 °C to 50 °C)
Humidity	5 % to 95 % RH., non-condensing
Protection	IP20, NEMA 1
Pollution degree	2

DIFFERENTIAL PRESSURE SENSOR	
PARAMETER	SPECIFICATION
Range	±2.0 inches WC (±500 Pa), bi-directional
Accuracy	±3 % of full range
Field replaceable differential pressure sensor.	

INTEGRATED ACTUATOR	
PARAMETER	SPECIFICATION
Torque	44 in-lbs. (5 Nm)
Run Time	<ul style="list-style-type: none"> Floating 108 sec at 50 Hz Floating 90 sec at 60 Hz
Mounting Shaft	<ul style="list-style-type: none"> Round 5/16 – 5/8 inches (8-16 mm) Square 15/64 – 33/64 inches (6-13 mm)
Shaft Length	≥ 1 5/8 inches (41 mm)
Position feedback via integrated potentiometer	

* Devices subject to local availability. Contact your local sales representative for information on available devices in your region.

PRODUCT SPECIFICATION

SOLID STATE RELAY (SSR)

SSR switches supply voltage and works with VAC and VDC. VDC switching does not support synchronous motor.

- 1.5 A constant; 3.5 A inrush for 0.1 sec per SSR output.
- Optional jumper between 24 VAC supply and SSR input shared by all SSRs.

UNIVERSAL IO (CONFIGURABLE AS ANALOG OUTPUT OR UNIVERSAL INPUT)

PARAMETER SPECIFICATION

AO	O(2) to 10 VDC direct/reverse with -3 mA to 20 mA or current output with O(4) to 20 mA.
UI	<ul style="list-style-type: none"> • O(2) to 10 VDC direct/reverse or O(4) to 20 mA input. • Sensors: 10 K Ohm NTC Type II, 10K-3 NTC, 10K3A1, 20 K ohm NTC, PT100, PT1000, NI1000TK5000, NI1000 Class B DIN43760, PT3000, 100 Ohm to 100 k Ohm resistive (custom characteristic). • Hardwired wall modules: set point, fan speed, override. • Dry contact binary input with direct/reverse. • All UI can be used for pulse input. Maximum frequency 100 Hz, Minimum duty cycle (50 % / 50 %) 5 ms ON / 5 ms OFF.

The Honeywell Optimizer VAV Controller has a single common terminal for every two Universal IOs, which protects them against 24 VAC mis-wiring and short circuits.

COMMUNICATION

PARAMETER	SPECIFICATION
Protocol supported	BACnet™ IP, BACnet™ MSTP, Sylk™, Modbus RTU (Modbus client only), and BLE
Ethernet Connection Speed	10/100 Mbps
Internet Protocol version	IPv4
IP Addressing Modes	<ul style="list-style-type: none"> • Dynamic : DHCP and Link Local • Static
Sylk™ Bus	2-wire, polarity-insensitive
Bluetooth	BLE, optional external antenna

STANDARDS AND APPROVALS

SPECIFICATION
CE
BACnet™ BTL®-Listed; IP and MS/TP Unitary models as BACnet™ Advanced Application Controller (B-AAC).
UL916, Energy Management Equipment
FCC Part 15, Class A
EN 55022. Class A
EN 61000-3-2, 61000
Plenum Tested (according to UL2043)

CONFORMANCE STATEMENT

FCC NOTICE:

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
This device may not cause harmful interference. This device must accept any interference received, including interference that may cause undesired operation.

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

Honeywell | Building Automation

715 Peachtree Street NE
Atlanta, Georgia 30308, USA

Honeywell GmbH

Hanns-Klemm-Str. 5
71034 Boblingen, Germany
buildings.honeywell.com

Honeywell | Building Automation

Building 5 Carlton Park, King Edward
Avenue, Narborough, Leicester
LE19 0LF, United Kingdom



@U.S. Registered Trademark
© 2024 Honeywell International Inc
31-00724-01 | Rev. 09-24

