

MED Approved Call Points

Call Points and Accessories

> Product Overview

- Marine Equipment Directive approved call points
- Suitable for use as part of fire protection systems in passenger ships, cargo ships and tankers, etc
- Ensures free movement of equipment within the EU and guarantees uniform application of standards in Chapter 11-2 of the international SOLAS (Safety of Life at Sea Convention)



- > KAC has gained wheelmark approval under the Marine Equipment Directive (MED) for its standard indoor and outdoor range of call points, allowing the approved products to be used as components in a fire protection system on board ships. Compliance with the latest version of MED, which defines the design and test standards and the procedures required for testing, became mandatory on 6 April 2010.

> Indoor Call Points:

Range of conventional call points with glass or resettable elements.

MCP1 - Resistor and clean contact electrical model, supplied with resistor and normally open contact

MCP2 - LED indicator as standard with resistor and normally open contact

MCP3 - Normally open & normally closed contact. Single pole changeover achieved with two terminal blocks

MCP4 - Double pole changeover contacts

> Outdoor Call Points:

Range of conventional call points with IP67 rating, with glass or resettable elements.

WCP1 - Resistor and clean contact electrical model supplied with resistor and normally open contact

WCP2 - LED indicator as standard with resistor and normally open contact

WCP3 - Normally open & normally closed contact. Single pole changeover achieved with two terminal blocks

WCP4 - Double Pole changeover set of contacts

> Applications



KAC

MED
Rev. No.1

> MCP




Environmental Specification:	
Humidity:	93± 3% non condensing
Operating Temperature:	-10°C to +55°C
Storage Temperature:	-10°C to +55°C
Ingress Protection (IP) Rating:	IP24D
For RoHS, WEEE & REACH please visit www.kac.co.uk	

Mechanical Specification:	
Material:	PC/ABS
Weight:	130g Flush and 180g Surface

For further information see datasheets:
MCP1
MCP2
MCP3
MCP4

Other colours available for Fire or other applications:
green, white, blue, yellow, orange
(Colour availability dependant on order volume)

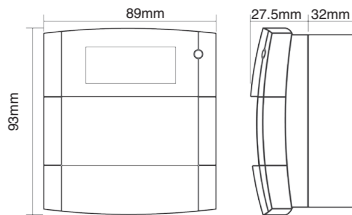

> WCP




Environmental Specification:	
Humidity:	93± 3% non condensing
Operating Temperature:	-25°C to +70°C
Storage Temperature:	-25°C to +70°C
Ingress Protection (IP) Rating:	IP67
For RoHS, WEEE & REACH please visit www.kac.co.uk	

Mechanical Specification:	
Material:	PC/ABS
Weight:	350g


For further information see datasheets:
WCP1
WCP2
WCP3
WCP4

Other colours available for Fire or other applications:
green, white, blue, yellow, orange
(Colour availability dependant on order volume)

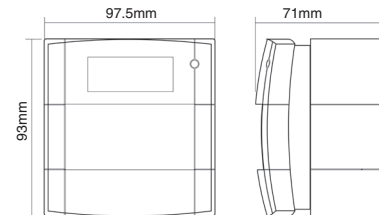

> Accessories

SR	Surface Mounting Box
ETT	European Terminal Tray
PTR	Pattress
M141W	Spacer Piece
PS200	Plain Hinged Cover



> KAC Alarm Company Ltd
KAC House, Thornhill Road,
North Moons Moat, Redditch,
B98 9ND, United Kingdom
Tel: +44 (0) 1527 406655
Fax: +44 (0) 1527 406677
e-mail: marketing@kac.co.uk

