

Security Solutions

Remote Annunciator SCSS-700ANN

The SCSS-700ANN red remote annunciator can be used to operate and program the SCSS-700 or SCSS-700ND FACP. The SCSS-700ANN's keypad and display match the built-in annunciator of the SCSS-700 control panel. The remote annunciator connects to the control panel via the RS-485 SBUS. When the system is in normal operation and has AC power, the Power LED is lit and all other LEDs are off. The other LEDs turn on as alarms, supervisories, troubles, and system silenced occur. The SCSS-700ANN can be surface or flush mounted and is also available in gray color as SCSS-700ANNG.

Features

- 160-character backlit LCD display (4 lines with 40 characters each)
- Operation and appearance is identical to SCSS-700ANN built-in annunciator
- Tactile/audible feedback when key is pressed on annunciator
- RS-485 SBUS interface to panel
- Can be flush or surface mounted. Trim ring (P/N RA-2000TR) available for surface mounting
- Initiate and end fire drills with a single key press
- Multi-panel displays can display the status and event history of all the panels they are assigned in a network.
- Multi-panel annunciators will sound the highest priority tone from the panel it is assigned to
- View current status by alarms, supervisories, or troubles
- On-board piezo sounder audibly indicates alarms, troubles, and supervisories
- Five Status LEDs for; alarms, supervisory, trouble, silence and AC power indications
- Four programmable function keys
- Available in red or gray color
- Wiring lengths up to 6000 ft. from the control panel
- UL listed, complies with NFPA 72
- **CSFM** listed
- MEA approved

Specifications

Operating Voltage: **24 VDC** Standby Current: 25 mA Alarm Current: 50 mA

Remote Annunicator

Agency Listings





City of NY COA# 6017



SCSS-700ANN

Operating Temperature: 32° F to 120° F

(0° C to 49° C)

Mounting: Surface or Flush

Dimension

Flush Mount:

12.25"W x 11.5"H x 7/8"D Outside wall:

(31.1W x 29.2H x 2.2D cm)

Inside wall: 9-3/8"W x 8-3/8"H x 2"D

(23.8W x 21.3H x 5.1D cm)

Surface Mount: Including Trim Ring:

> 12.25"W x 11.5"H x 3"D (31.1W x 29.2H x 2.2D cm)

Optional Accessories

RA-2000TR Red surface mount trim

RA-2000GRAYTR Gray surface mount trim

Compatible Control Panels

SCSS-700 Intelligent Fire Alarm

Control Panel


SCSS-700ND Intelligent Fire Alarm


Control Panel without built

in display

P/N 351524 Rev A

Copyright © 2010 Honeywell International Inc.

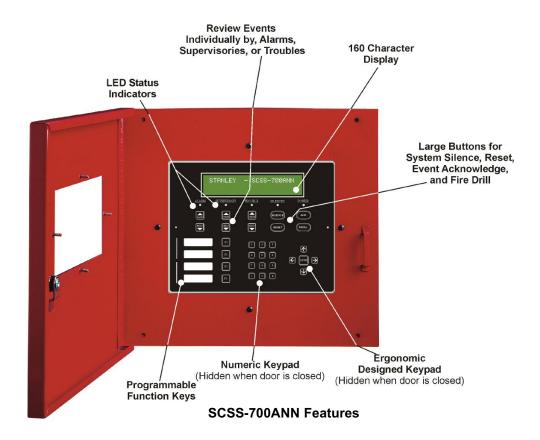

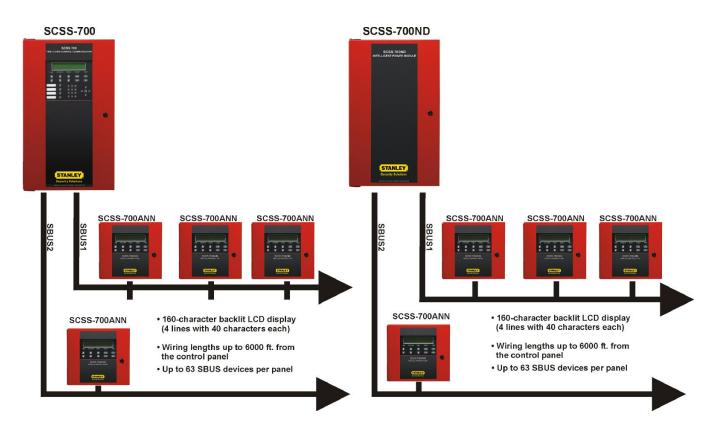



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Stanley Convergent Security Solutions, Inc. Phone: 877-476-4968 www.stanleycss.com

